


DY2108

AUTORANGING DIGITAL MULTIMETER

- Patented mis-operation prevention: terminal shutter interlock mechanism, patent code: ZL 01 20 15021.5
- Feature rich design DMM with up to 11 functions
- Heavy duty rubber holster
- Input fuse protection
- Data hold, auto power off
- LCD max. 4000 counts

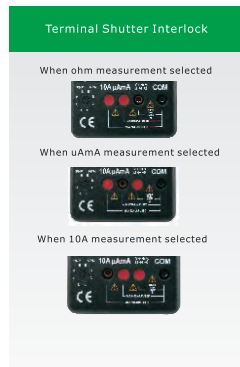

SPECIFICATION	RANGE	ACCURACY
DC V	400mV±(0.8%+3)	
	4V/40V/400V±(0.8%+1)	
	600V±(1%+3)	
AC V	400mV±(1.5%+5)	
	4V/40V/400V±(1.2%+3)	
	600V±(1.5%+5)	
DC A	400uA/4000uA/40mA/400mA±(1.5%+5)	
	4A/10A±(1.5%+5)	
AC A	400uA/4000uA/40mA/400mA±(1.5%+5)	
	4A/10A±(2.5%+5)	
Resistance	400Ω±(1%+5)	
	4K/40K/400K/4MΩ±(1%+3) 200MΩ±(1.5%+5)(30sec)	
Capacitance	4nF±(4%+5)	
	40nF/400nF/4uF/40uF±(3%+5)	
	20nF±(4%+5)	
Frequency	9.999Hz/99.99Hz/999.9Hz/9.9999kHz/ 99.99kHz/999.9kHz/9.999MHz±(1.0%+5)	
	Duty Test	1% ~ 99%
Diode Test	yes	
Transistor Test	yes	
Continuity buzzer	< 50Ω	
Data Hold	yes	
Voltage Test Input Impedance	10MΩ	
Low Battery Warning	yes	
Auto Power Off	yes	
Terminal Shutter Interlock	yes	
Max. Displays	4000	
Power	9V 6F22 * 1	
Dimension	192*88*42mm	
Weight	approx. 600g	

DY21C | DY21D

PALM SIZE AUTORANGING MULTIMETER WITH NCV

- Patented palm size housing design for featured market recognition
- Heavy duty rubber holster
- Non-contact voltage detection(DY21D only)
- Auto range, auto power off, low battery warning, data hold



SPECIFICATION	RANGE	ACCURACY	DY21C	DY21D
VDC	200mV/2V/20V/200V/600V	±(0.5%+5)	●	●
VAC	2V/20V/200V/600V	±(1.2%+5)	●	●
ADC	200μA/2000μA/2mA/20mA/200mA	±(2.0%+5)	●	●
AAC	200μA/2000μA/2mA/20mA/200mA	±(2.5%+5)	●	●
Resistance	200/2000/20k/200k/2M/20MΩ	±(0.8%+5)	●	●
NCV	100V~600V AC			●
Continuity Buzzer			●	●
Diode			●	●
Auto range			●	●
Data hold			●	●
Auto power off			●	●
Low Battery Warning			●	●
Power Source			CR2032*1	CR2032*1
Max. Displays			1999	1999
Dimension			135 x 100 x 30 mm	
Weight			approx. 250g	